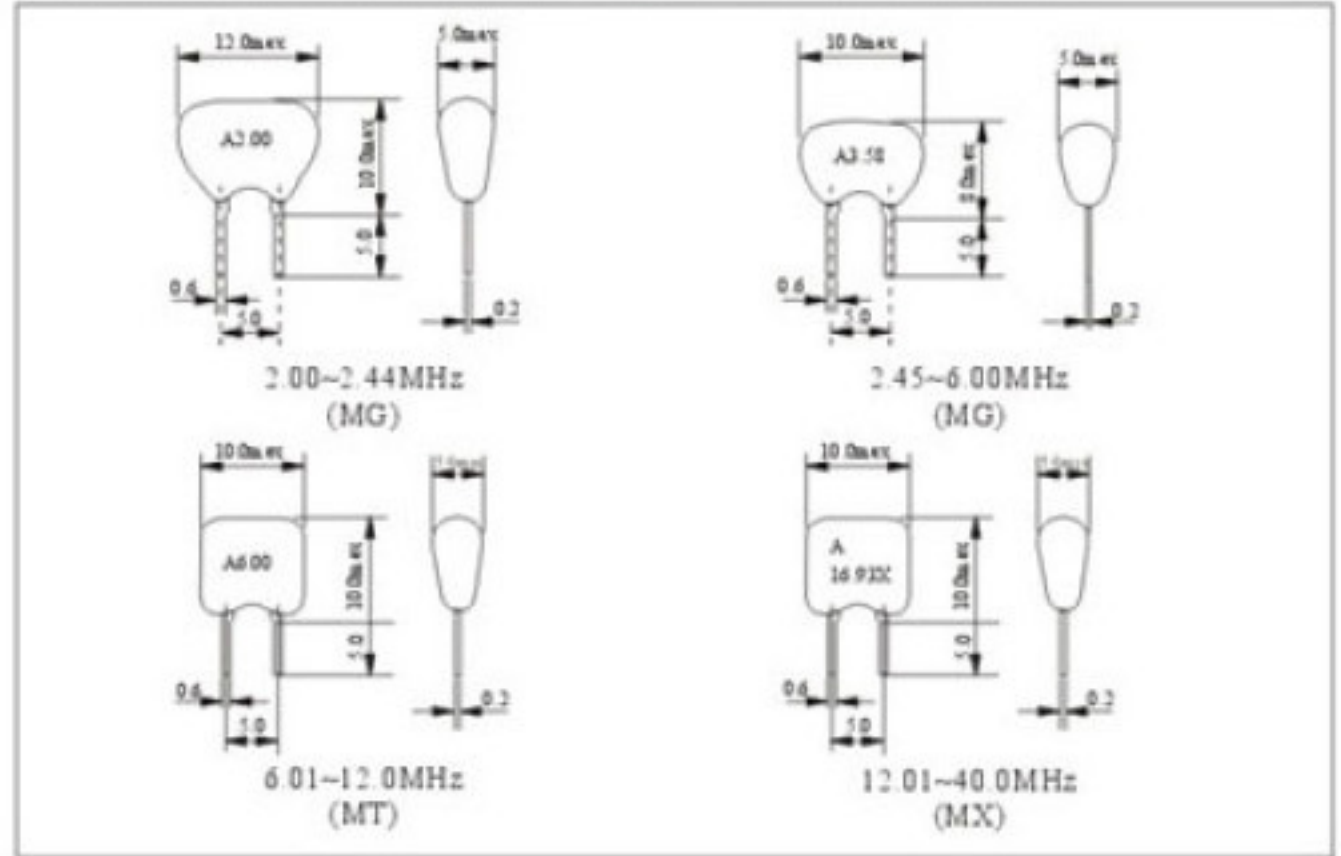
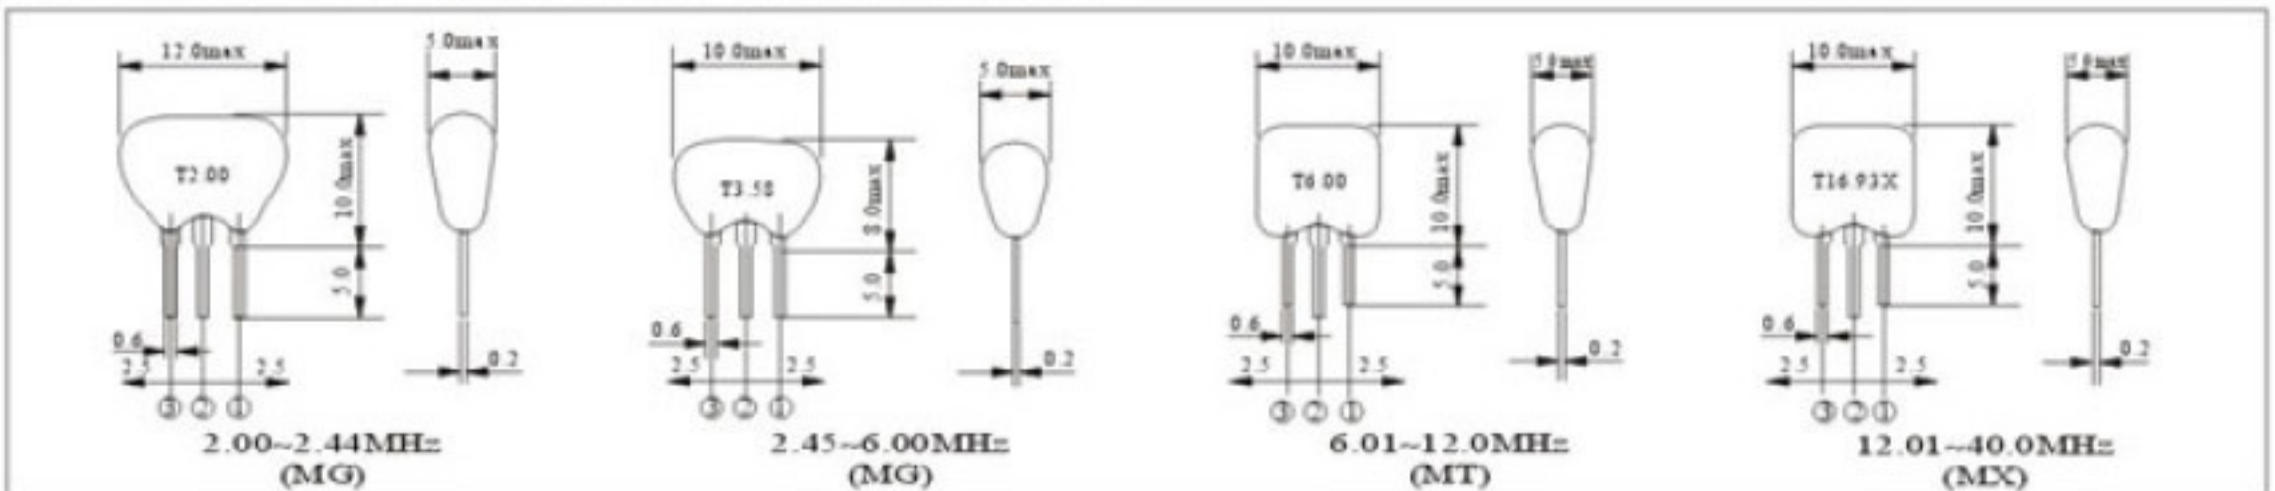


**ZTA/ZTT SERIES**

**⊕ DIMENSIONS(Unit:mm) 外形尺寸 (ZTA Series)**

**⊕ DIMENSIONS(Unit:mm) 外形尺寸 (ZTT Series)**

**⊕ PRINCIPAL PARAMETERS 主要参数**

Model 型号	Frequency Range 频率范围 (MHz)	Frequency Accuracy 频率精度 (+25°C)	Temperature Stability 温度稳定性 (-20°C~+80°C)	Operating Temperature 工作温度	Aging(Ten Years) 老化性 (10年)
ZTA□□□MG	2.00 - 6.00	±0.3%	±0.3%	-20°C ~ +80°C	±0.3%
ZTA□□□MT	6.01 - 12.0		±0.5%		±0.5%
ZTA□□□MX	12.01 - 40.0		±0.3%		±0.3%
ZTT□□□MG	2.00 - 6.00	±0.3%	±0.3%	-20°C ~ +80°C	±0.3%
ZTT□□□MT	6.01 - 12.0		±0.5%		±0.5%
ZTT□□□MX	12.01 - 40.0		±0.3%		±0.3%

**⊕ TEST CIRCUIT 测量线路**
