


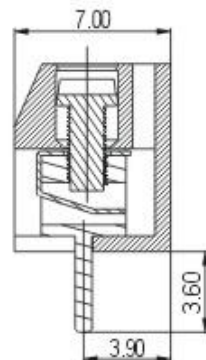


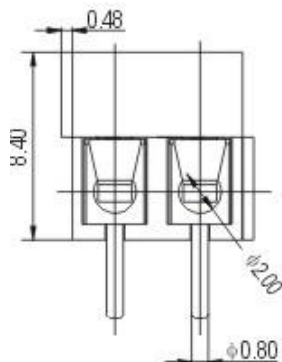





DG340-3.81



APPROVAL Electrical		
Standard	UL	IEC
Rated voltage	300V	130V
Rated current	7A	10A
Wire range	24-18AWG	1.0mm ²
Withstanding voltage	AC1250V/1Min	
Menchanical		
torque	0.2Nm(1.7Lb-In)	
Ambient temperature	-40°C~+105 °C	
Strip length	5-6mm	
Dimensions		
pitch	3.81mm(.150")	
Poles	2P,3P-24P	
Material		
Housing	PA66,UL94V-0	
Screws	M2,steel, Cr ³⁺ Zn-plated	
Pin header	Brass,Tin plated	
Wire guard	Phosphor bronze	

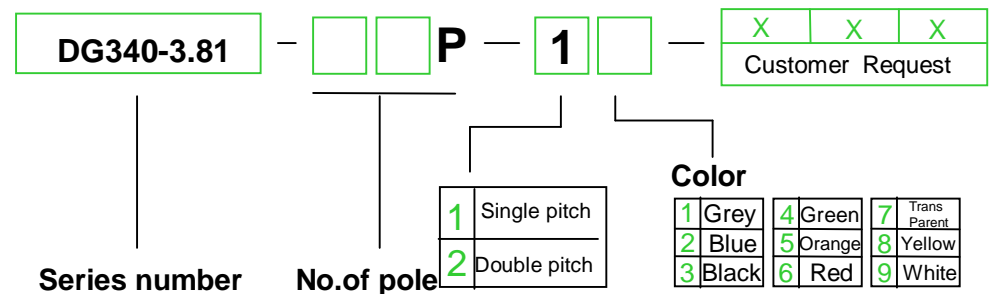HOW TO ORDER :



	 DEGSON ELECTRONICS CO., LTD.
	NAME DG340-3.81