

1 2 3 4 5 6 7 8

A

B

C

D

E

F

G

H

A

B

C





D

E

F

G

H

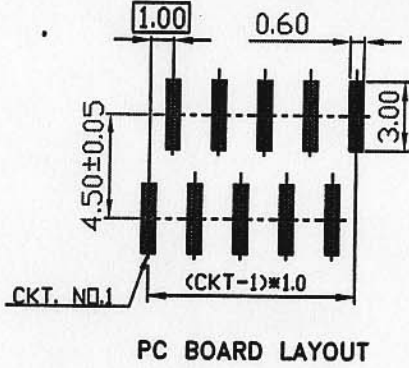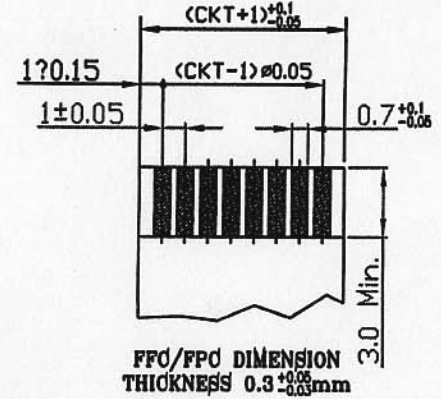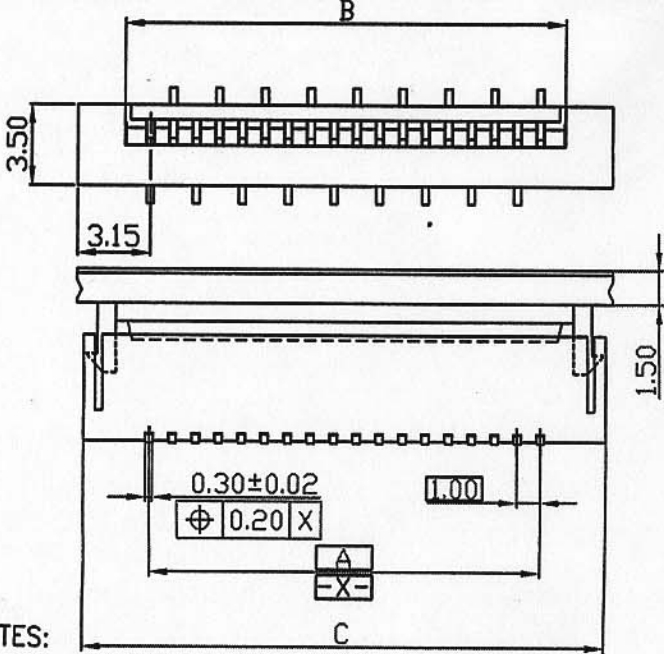

- NOTES:
1. Material: INSULATOR: NYLON ; COVER: P.P.A. TERMINAL: PHOSPHOR BRONZE
 2. FLASH: 0.08mm MAX.
 3. CAMBER: 0.05mm/cm MAX.
 4. WARP: 0.05mm/cm
 5. DEFORMATION: NA. , TWIST: NA.

ORDER INFORMATION

Contact No.	Mounting Type	Contact Plating	Packing Style	Insulator Color		
C3916 - 32	V	T	T	I	0	0
03~32	Vi Vertical Type (Normal Layout)	Ti Tin	Ti Tube Re Tape&Reel	Ii Ivory	FILL It With '0'	FILL It With '0'

30	29.00	31.20	35.00
29	28.00	30.20	34.00
28	27.00	29.20	33.00
27	26.00	28.20	32.00
26	25.00	27.20	31.00
25	24.00	26.20	30.00
24	23.00	25.20	29.00
23	22.00	24.20	28.00
22	21.00	23.20	27.00
21	20.00	22.20	26.00
20	19.00	21.20	25.00
19	18.00	20.20	24.00
18	17.00	19.20	23.00
17	16.00	18.20	22.00
16	15.00	17.20	21.00
15	14.00	16.20	20.00
14	13.00	15.20	19.00
13	12.00	14.20	18.00
12	11.00	13.20	17.00
11	10.00	12.20	16.00
10	9.00	11.20	15.00
09	8.00	10.20	14.00
08	7.00	9.20	13.00
07	6.00	8.20	12.00
06	5.00	7.20	11.00
05	4.00	6.20	10.00
04	3.00	5.20	9.00
03	2.00	4.20	8.00
CKT	DIM A	DIM B	DIM C

玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

UNIT		SCALE		PART NAME	
MM		3:1		1.0mm ZIF FPC VERTICAL TYPE (NORMAL LAYOUT)	
APPD.	CKD.	TOLERANCE		PART NO.	REV.
		± 0.3		C3916-XXVTXI00	A

制表日: 2002/08/10

DRAWING. APPROVED
Jane

1 2 3 4 5 6 7 8