
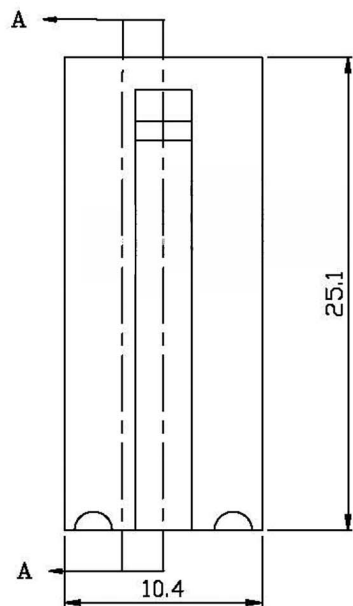


Specifications:

- Poles: 2 Poles
- **Pitch Between Poles: 4.5mm**
- Current Rating: 5A
- Voltage Rating: 250V AC, DC
- Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- Contact Resistance: Initial value/10m Ω max
After environmental testing/20m Ω
- Withstand Voltage: 1500V AC/minute
- Insulation Resistance: 1000 M Ω /min
- Material: Nylon UL94V-0

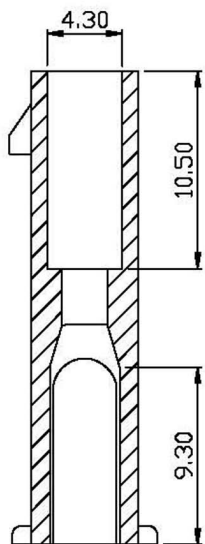

RoHS Compliant		玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Helen		TOLERANCE 容許公差 .0 ±0.25 .00 ±0.13 ANG. ±	PART NAME 品名 φ1.30mm FEMALE HOUSING 1X2P WHITE COLOR W/O EAR ROHS LOW-LEAD
DWG. 製圖 Yumi	SCALE 比例 參考	UNIT 單位 MM	PART NO. 料號 H1030-02PSNW00R
DATE 制表日 2008/06/12	PAGE 張數 1 OF 1	SIZE 紙張尺寸 A 4	REV. 版本 A