


A-A

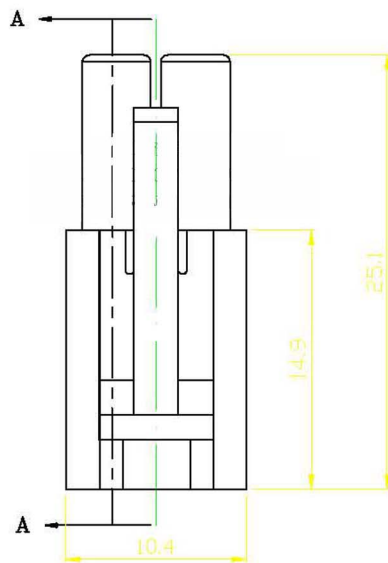

Specifications:

- Poles: 2 Poles
- Pitch Between Poles: 4.5mm
- Current Rating: 5A
- Voltage Rating: 250V AC, DC
- Temperature Range: $-25^{\circ}\sim+85^{\circ}\text{C}$
- Contact Resistance: Initial value/10m Ω max
After environmental testing/20m Ω
- Withstand Voltage: 1500V AC/minute
- Insulation Resistance: 1000 M Ω /min
- Material: Nylon UL94V-0

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Helen	 SCALE 比例 参考 UNIT 單位 M M	TOLERANCE 容許公差 .0 ±0.25 .00 ±0.13 ANG. ±	PART NAME 品名 ψ 1.30mm MALE HOUSING 1X2P WHITE COLOR ROHS LOW-LEAD
DWG. 製圖 Yumi		SIZE. 紙張尺寸 A 4	PART NO. 料號 H1130-02PSW000R
DATE 制表日 2008/06/12	PAGE 張數 1 OF 1	REV. 版次 A	