

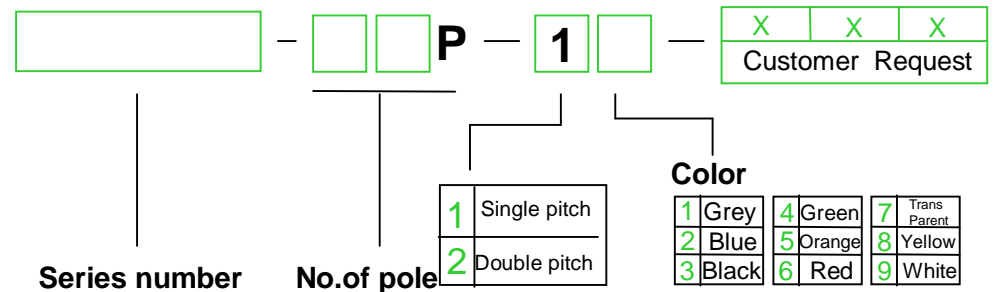


<b>APPROVAL</b>		
<b>Electrical</b>		
Standard	<b>UL</b>	<b>IEC</b>
Rated voltage	600V	1000V
Rated current	60A	65A
Wire range	20-6AWG	2.5-16mm <sup>2</sup>
Withstanding voltage	AC3500V/1Min	
<b>Menchanical</b>		
Torque	1.2Nm(10.5Lb-In)	
Ambient temperature	-40°C~+105 °C	
Strip length	10mm	
<b>Dimensions</b>		
pitch	10.16mm(. 400" )	
Poles	2P,3P-24P	
<b>Material</b>		
Housing	PA66,UL94V-0	
Screws	M4,Steel, Cr <sup>3+</sup> Niplated	
Pin header	Copper,Tin-plated	
Cage	Brass,Ni-plated	

### HOW TO ORDER :



	 <b>DEGSON ELECTRONICS CO., LTD.</b>
	<b>NAME</b> <b>DG136T-10.16</b>