


### SPECIFICATIONS

**Electrical**  
 Current Rating: 3A AC, DC  
 Voltage Rating: 250V AC/ max.  
 Operating Temp.: -25°C ~ +85°C  
 Insulation Resistance: 1000MΩ/ min.  
 Withstand Voltage: 800V AC/ min.  
 Contact Resistance: 20mΩ/ max.

**Material**  
 Terminal Material: Tin/ Gold Plated  
 Material: Nylon 66, UL94V-0

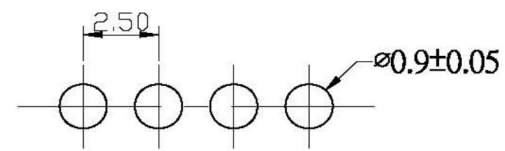

RECOMMENDED P.C.BOARD HOLE DIMM.

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Hedy	SCALE 比例 参考	TOLERANCE 容許公差 X.XX ±0.25 X.X ±0.3 ANG. ±	PART NAME 品名 2.5mm WAFER 4P RIGHT ANGLE TYPE W/LOCKING RIB TIN PLATED WHITE INSULATOR ROHS LOW-LEAD
DWG. 製圖 Yumi			
DATE 制表日 2010/05/20	PAGE 張數 1 OF 1	REV. 版次 A	PART NO. 料號 W2490-04PRTW00R