

1 2 3 4 5 6 7 8

A

A

B

B

C

C

D

D

E

E

F





F

G



G

H

H



PCB LAYOUT

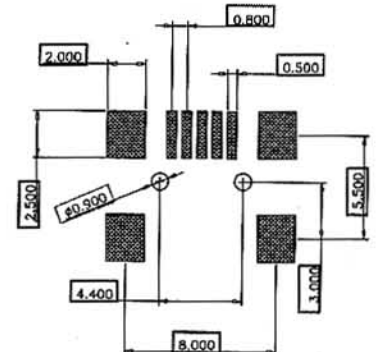

Specification:

- Current rating: 1 A Max.
- Dielectric withstanding voltage: 100 V(ac) for 1 min.
- Contact resistance: 50 m W Max.
- Insulation resistance: 100 M W Min.
- Total mating force: 3.57 Kgf Max.
- Total unmating force: 0.71 Kgf Min.
- Temperature range: -55°C~105°C

Material:

- Housing: Nylon 6T
- Contact: Phosphor Bronze
- Shell: Brass

玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

UNIT		SCALE	PART NAME	
MM		6:1	MINI USB B TYPE 5P (MINI B P.C.B SMT)	
APPD.	CKD.	TOLERANCE	PART NO.	REV.
		± 0.3	C8320-05BFDSB0	A

制表日: 2002/05/09

DRAWING. APPROVED
Jane

1 2 3 4 5 6 7 8