

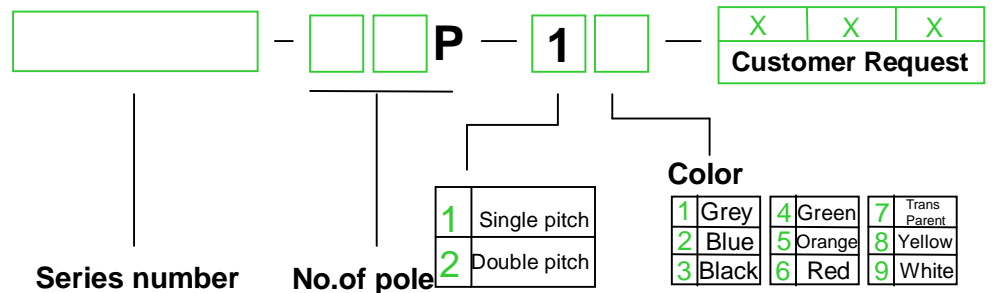





<b>APPROVAL</b>		
<b>Electrical</b>		
Standard	<b>UL</b>	<b>IEC</b>
Rated voltage	300V	750V
Rated current	20A	32A
Wire range	20-10AWG	0.5-4.0mm <sup>2</sup>
Withstanding voltage	AC3000V/1Min	
<b>Mechanical</b>		
Torque	0.8Nm(7.0Lb-In)	
Ambient temperature	-40°C~+105°C	
Strip length	10-12mm	
<b>Dimensions</b>		
Pitch	7.5mm(.295")	
Poles	1P 2P	
<b>Material</b>		
Housing	PA66,UL94V-0	
Screws	M3.5, Steel,Cr <sup>3+</sup> Zn plated	
Contact	Copper, Tin plated	
Cage	Brass ,Ni plated	

### HOW TO ORDER :



	 <b>DEGSON ELECTRONICS CO., LTD.</b>
	<b>NAME</b> <b>TSC4</b>