
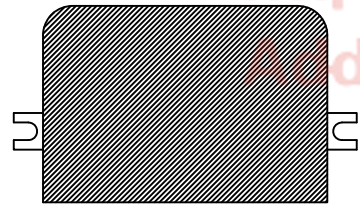
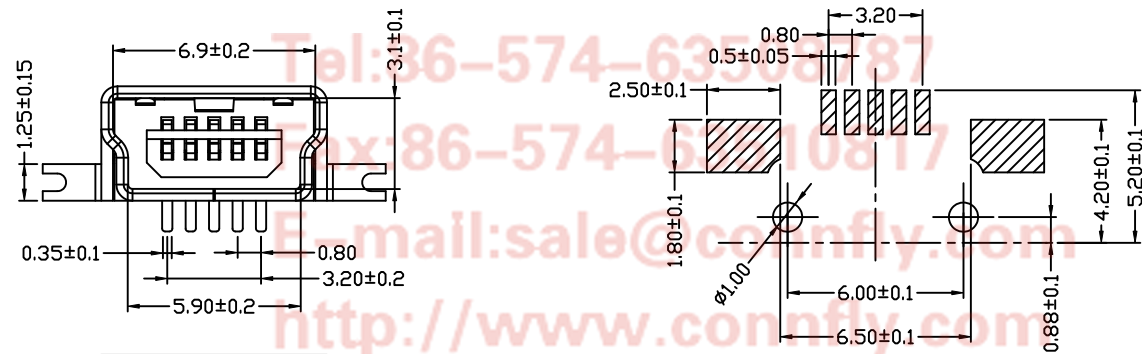


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 03/23/16'	~	

NOTES:  
 1. SPECIFICATIONS  
 Housing: Thermoplastics,UL94V-0  
 Contact: Copper Alloy  
 Shell: Copper Alloy  
 Voltage Current Rating:1.5 AMP. 30V AC  
 Insulation Resistance:1000MΩ Min.  
 Contact Resistance:30 mΩ Max.  
 Dielectric Withstanding Voltage:500V AC  
 Temperature Range:-55℃ to +85℃  
 2. PRODUCT NUMBER CODE:

DS1104 - X X X X X X X

- X: Packing type
- R: Tape on reel
- B: Tube
- X: Pick up support
- S: W/ Pick up
- SHELL PLATING
- 6: Full tin
- X: Color of housing
- B: Black
- X: Contact Plating
- O: Selective gold flash
- X: Mounting type
- S: SMT type
- X: Connector type
- S: Socket

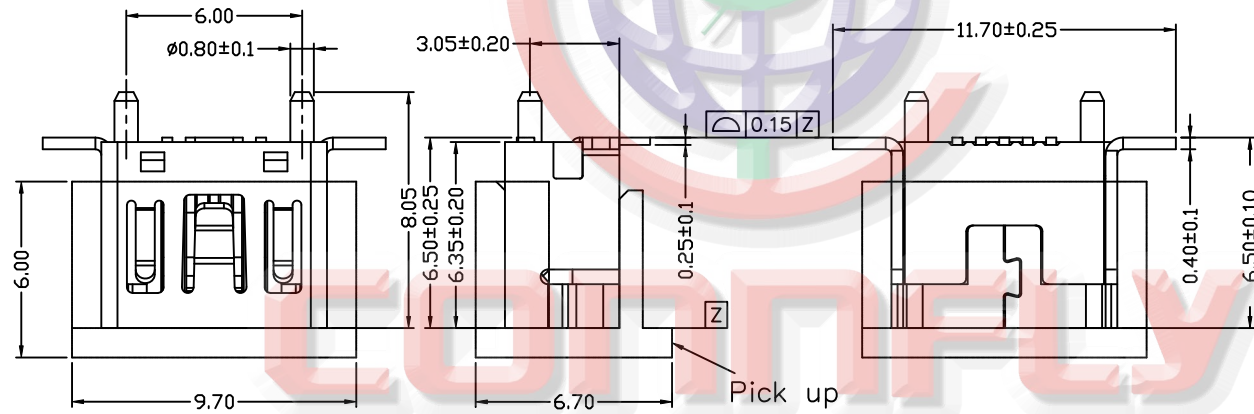

Recommended PCB Layout

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	MINI USB 5 pos. RECEPTACLE SMT TYPE			
X.	±0.60	X.	±5°	UNITS	mm					
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1104-06 SERIES			
.XX	±0.25	.XX	±2°			晨翔电子有限公司 <b>CONNFLY CONNFLY ELECTRONIC CO., LTD</b>				
DRAWING TYPE		CUSTOMER								
SCALE		1:1		SHEET					1 OF 1	
DRAWING NO.		C-DS1104-06-XXXXXX-A								